

Mobile iPhone Cradle

CMIC-103 Apple iPhone 3G / Apple iPhone 3GS / Apple iPod Touch 2G

carcomm®
Mobile Solutions

Introduction

This installation manual has been prepared to provide the basic information needed to install this product. This manual is not intended to be definitive, because there are different models and types of vehicles which will require different installation work. The information given is for general guidance only.

The terms of warranty demand that this mobile cradle is installed by an experienced installer. An end-user should never attempt to install this mobile cradle without professional assistance as the installation requires special tools and knowledge.

Note: Thoroughly read the manual before beginning the installation procedure.

WARNINGS

1. Ensure that the vehicle's battery is disconnected before you start the installation procedure and that it remains disconnected during the procedure.
2. Do not smoke or use open flames when working near the vehicle's fuel system.
3. Ensure that the vehicle's electrical cables, hydraulic lines, fuel lines and safety equipment are not damaged during the installation.
4. Ensure that normal control and operation of the vehicle is not obstructed by the installation, particularly the brakes and steering. Ensure that airbag operation is not obstructed.
5. Electronic and other sophisticated systems (for example speed control, ABS anti-lock brake, fuel injection-, navigation- and airbag systems) are relatively immune to malfunction caused by the iPhone. However, should you experience false operation of these systems or are in any doubt whatsoever as to their functionality, please consult the vehicle's dealer.
6. The mobile cradle is suitable for use only in vehicles with a 12V / 24V negative grounding. Use on other supply voltages or alternative polarity will damage the equipment.
7. The iPhone should not be left switched on for extended periods without running the vehicle's engine. Failure to comply could drain the vehicle's battery.

Before starting the installation of the mobile iPhone cradle please check if the following contents are present :

- Carcomm iPhone® cradle
- Audio-Out cable and 12/24V cigarette lighter plug
- Cable with fuse for a permanent power supply
- Rotating swivel
- Window mount with suction cup
- Surface cleaner
- Screw sets
- Manual


Additional free extras :

- Protective film



Compatible devices

Apple iPhone 3G
Apple iPhone 3GS
Apple iPod Touch 2G

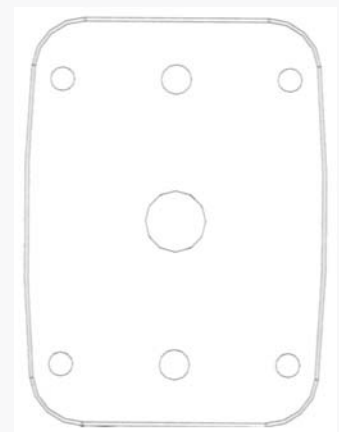

Safety Mount pattern

© Copyright Carcomm International BV 2007. Subject to change without previous notice. All used brandnames and logos are owned by their respective owners

Mobile iPhone Cradle

CMIC-103 Apple iPhone 3G / Apple iPhone 3GS / Apple iPod Touch 2G

carcomm®
Mobile Solutions

Installing the Mobile PDA Cradle


If you choose to use the cigarette lighter plug for power, the installation is fairly simple.

- Connect the 8 pin mini-DIN Audio-out cable to the cradle cable.
- Connect the Audio-out to your car-stereo / in-car DVD system (when available).
- Plug in the cigarette lighter plug.

If you choose to hard-wire the cradle into the car you can use the supplied power cable with in-line fuse. If you use this option you have to cut off the cigarette lighter plug and instead connect the supplied power cable with fuse.

- Connect the RED cable to the 12V or 24V power of the vehicle.
- Connect the BLACK cable to the vehicle ground.

Connect the power cable to the power of the car that is controlled by the ignition key so that the iPhone® cannot accidentally drain the car battery.

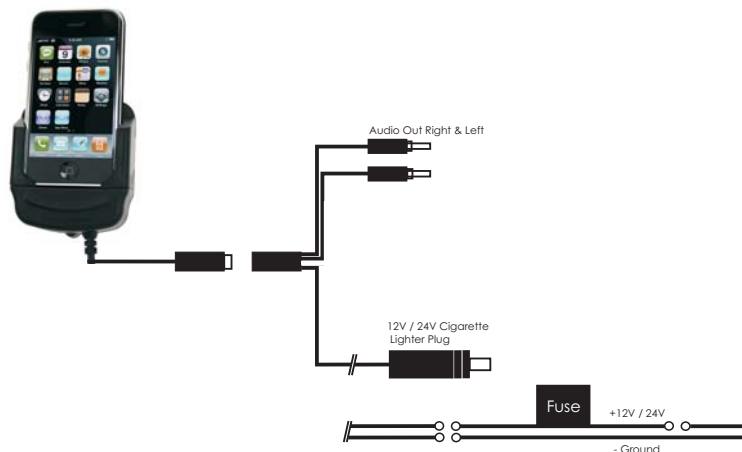

Attention : Video out is not supported by the CMIC-103

The cradle is designed to minimize scratches and other surface damage on the iPhone®. For extra protection a protection skin is included with the Carcomm iPhone® cradle.

